

**holaras**



# SILAGESPREADER



## **PROCESS GRASS SILLAGE**

IN LARGE QUANTITIES

IN ONE OPERATION

INTENSIVE

EVENLY

FAST

Hoopman Machines B.V.

Dinxperlosestraat 145

NL-7122 JP Aalten

**T** +31 (0)543 466224

**E** [info@holaras.nl](mailto:info@holaras.nl)

**W** [www.holaras.nl](http://www.holaras.nl)



## JUMBO/VIKING

The Holaras **Silagespreaders** process large quantities of grass silage intensively and evenly. In addition, they allow a quicker distribution in one working pass. During the distribution you can continue to drive the tractor along the middle of the grass silage, avoiding dangerous manoeuvres along the edges and lost time. For raising the edges, the machine has rubber sideboards that can be folded and/or extended up to six metres in width. The **silagespreaders** are supplied with deep-hoe buckets as standard.

The Holaras **Viking** is extremely strong build and has an own weight of approx. 2250 kg. (excl. grass fork). The machine is specially arranged for tractors over 180 HP.

The **Jumbo-KS** can be equipped with independent rotors, so that the grass can be distributed faster and more flexibly. Depending on the situation on the pit, the driver can choose the rotational direction of the rotors individually: to the left or right, to the front or to the rear.

The -holaras- **silagespreader** can be supplied with an inverse reduction gearbox for front attachments. The **JUMBO-G** and **VIKING** are suitable for a hydraulic foldable grass fork (SHB). The H-Jumbo-S is arranged for shovel attachments and hydro-electric drives. The -holaras- **VIKING** is extremely strong build and has an own weight of approx. 2250 kg. (excl. grass fork). The machine is specially arranged for tractors over 180 HP.

**JUMBO:** Silage spreader, hydr. swing

**JUMBO-G:** Strong and heavy build frame. Hydraulic foldable and extendable

**JUMBO-KF:** Specially for Front coupling

**JUMBO-KS:** Arranged for wheel loader coupling. Hydromotor driven



**VIKING:** Extremely strong build. Specially arranged for tractors over 180 HP

## TECHNICAL SPECIFICATIONS

	JUMBO	JUMBO-G	JUMBO-KF	JUMBO-KS	VIKING
Coupling	3-point	3-point	Front	Wheelloader	3-point
Weight (kg)	1050	1300	2405	1400	2250
Rotors	2	2	2	2	2
Drive	PTO	PTO	PTO	Hydromotor	PTO
Transport width (cm)	300	300	300	300	300
Working width (cm)	600	600	600	600	600
Suitable for hydr. grassfork (SHB)	-	Ja	Ja	Ja	Ja
Hydr. swing	Ja	-	-	-	-
Hydr. fordable	○	●	●	●	●
Hydr. extendable	○	●	○	●	●
Independent rotors	-	-	-	○	-
Elektro-hydr. operation	○	○	○	●	○
Oil	40 ltr./ 180 bar	40 ltr./ 200 bar	40 ltr./ 200 bar	150 ltr./ 200 bar	40 ltr./ 200 bar
Front- and rear mounting / usage	○	○	-	-	●

● standard  
○ option  
- n.a.



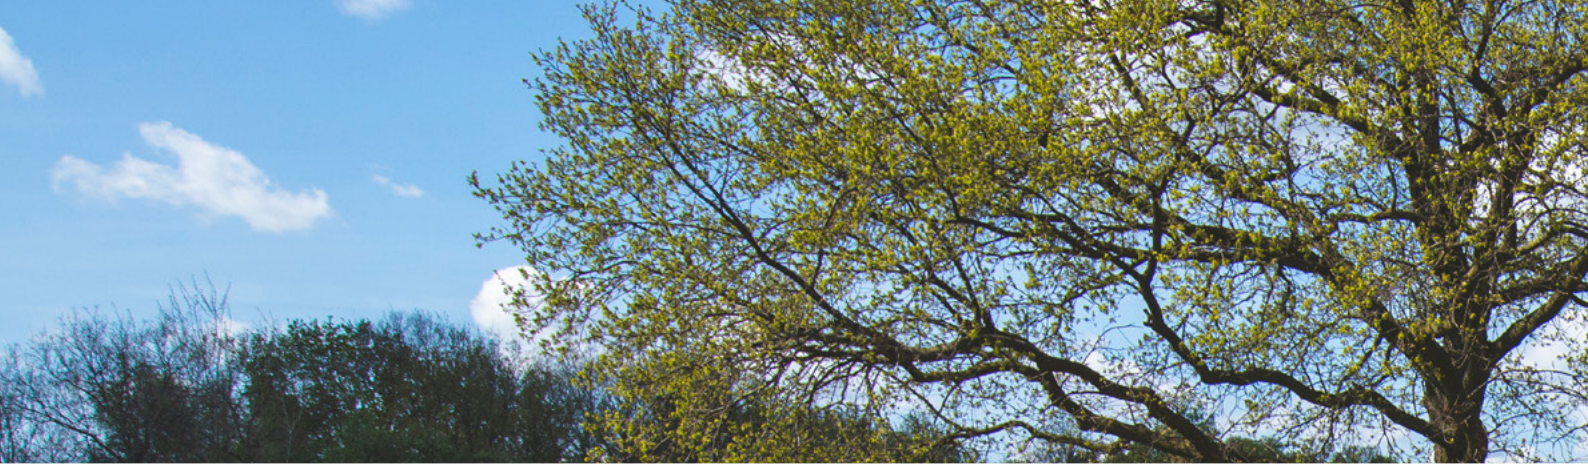

Hoopman Machines B.V.  
Dinxperlosestraat 145  
NL-7122 JP Aalten

T +31 (0)543 466224  
E [info@holaras.nl](mailto:info@holaras.nl)  
W [www.holaras.nl](http://www.holaras.nl)